(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 17 February 2005 (17.02.2005)

PCT

(10) International Publication Number WO 2005/015078 A1

(51) International Patent Classification7:

F21S 8/00

(21) International Application Number:

PCT/IB2004/051367

(22) International Filing Date: 3 August 2004 (03.08.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

03102506.7


12 August 2003 (12.08.2003)

- (71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): WIJBENGA, Hendrik [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). ENTROP, Jean, P. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

- (74) Agent: PET, Robert, J.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: LUMINAIRE AND METHOD

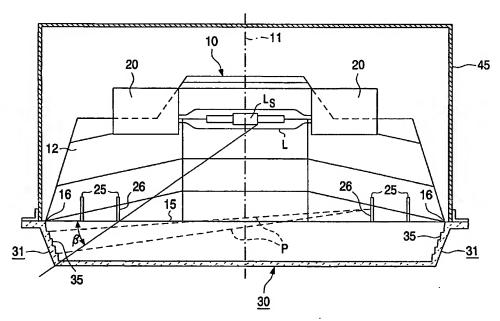

(57) Abstract: The luminaire has a reflector (10) having a light emission window (15), near to first opposed edges (16) of which respective sets of strips (25) are present to create a cut-off angle β. The reflector (10) is closed by a hood (30) which, along first walls (31) thereof close to the first edges (16), have refracting elements (35) to cause the luminaire to emit light at small angles to the light emission window (15), within the cut-off angle β . The luminaire is suitable to be used for under canopy lighting of a petrol station and to signal to the distance that the station is open, without dazzling oncoming drivers. The method involves the use of the luminaire mounted to the ceiling of the canopy.

WO 2005/015078 A1



Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.